


# Chatbox Duo

## Nursery for nascent ideas

One-on-ones thrive here. A safe space for private conversations. A quiet bubble for chasing and sharing ideas.



1-2 people



### Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



### Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



### Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



### Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



### Quick assembly

Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.



### Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.



### Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

### Standard exterior colors



Black



White

### Standard interior color



Dark gray

### Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite







Storm Gray



Frozen Blue



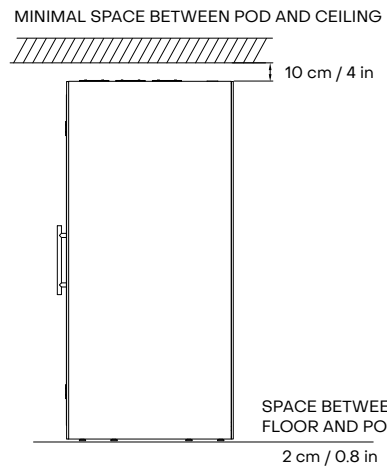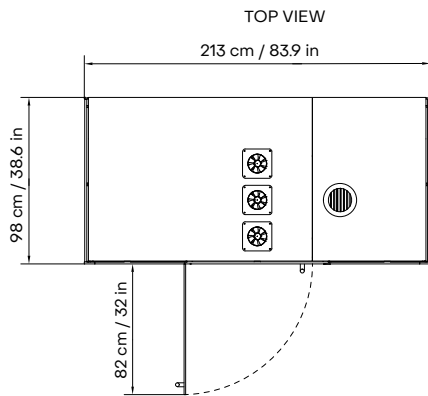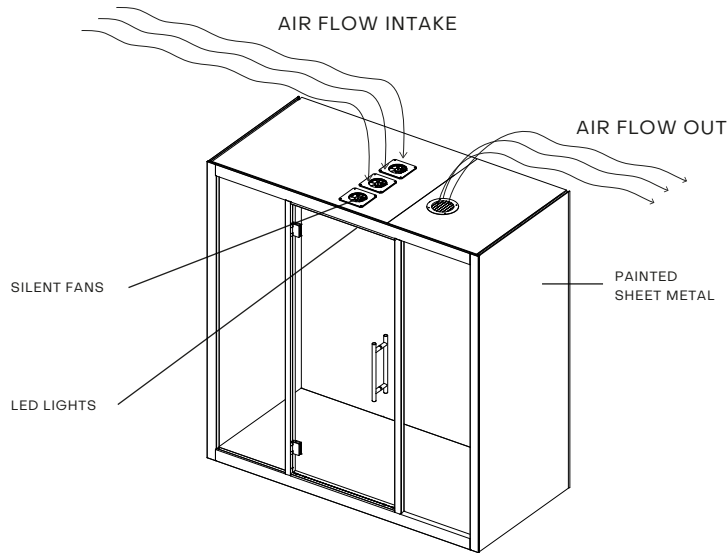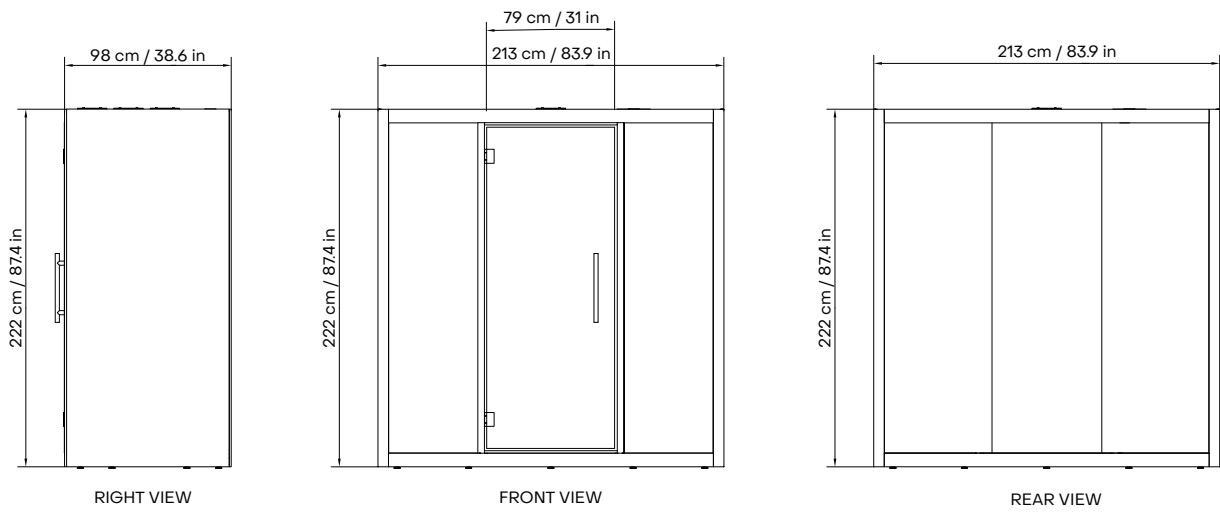

# Chatbox Duo technical specification

## GENERAL PRODUCT INFO

<b>Exterior size (W*D*H)</b>	213 × 98 × 222 cm 83.9 × 38.6 × 87.4 in
<b>Interior size (W*D*H)</b>	200 × 91 × 204 cm 78.7 × 35.8 × 80.3 in
<b>Weight (net)</b>	490 kg / 1080 lb
<b>Door handedness</b>	left- and right-handed door in one
<b>Air ventilation</b>	low consumption air circulation system (max 5.1 W)
<b>Air flow</b>	air circulation speed is more than 55 l/s (198 m <sup>3</sup> /h) (117 ft <sup>3</sup> /min)
<b>Lighting</b>	energy-efficient LED light (28 W, 4000 K, 2240 lm)
<b>Power outlets</b>	Option one: 2 x 110-240 V (10 A) Option two: 110-240 V (10 A) + USB-A+C
<b>Power cord</b>	3 m / 9 ft 10 in
<b>Exterior material</b>	painted sheet metal
<b>Glass</b>	sound control laminated safety glass
<b>Floor</b>	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
<b>Acoustic surfaces</b>	acoustic EchoFree panel
<b>Adjustable glides</b>	for easy leveling from inside the booth

## CERTIFICATION

<b>Electrical safety</b>	CE-mark
<b>Fire safety</b>	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
<b>Emissions</b>	Indoor Advantage™ Gold certified by SCS Global Services
<b>Sound reduction</b>	29,4 db (class B according to ISO 23351-1)
<b>Airborne sound insulation R'w</b>	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
<b>Sound transmission class STC</b>	34 dB according to ASTM E90, measured on site by an accredited specialist




## Chatbox Duo features



Retractable coat/bag hook



Air flow and lighting dimmer



Occupancy light

### EXTRA FEATURE

**Retractable coat/bag hook** A practical and nice-looking foldable hook for coat or bag


**Air flow and lighting dimmer**

**Occupancy light**

**Mobility kit** Set of detachable casters for moving booths.  
Can be used for all Chatbox models.

## Options for surfaces

### Exterior colors collection

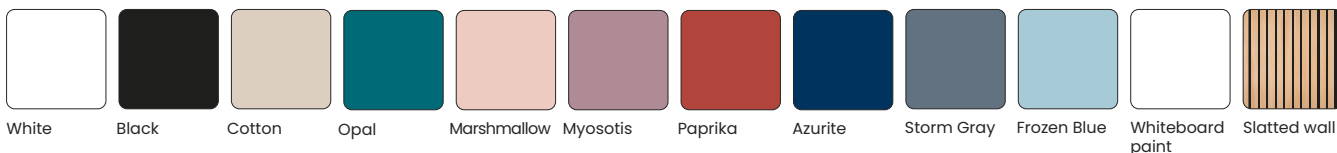

### Standard wall and ceiling




Dark gray

### Standard floor



Dark gray

### Standard profile



Black

