


Chatbox Duo

Nursery for nascent ideas

One-on-ones thrive here. A safe space for private conversations. A quiet bubble for chasing and sharing ideas.



Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



Quick assembly

Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.



Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.




Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.


Standard exterior colors






Standard interior color




Colour collection for additional price

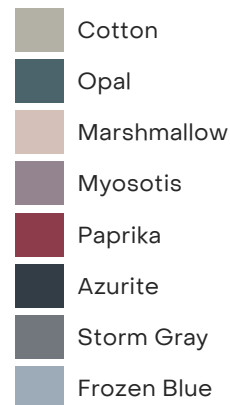

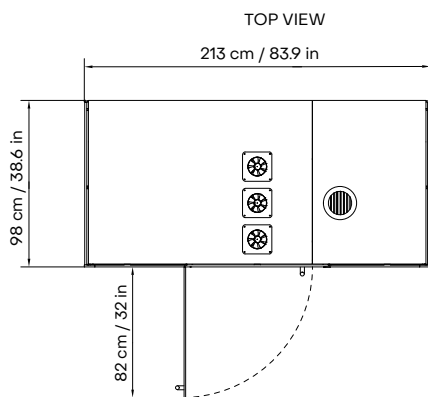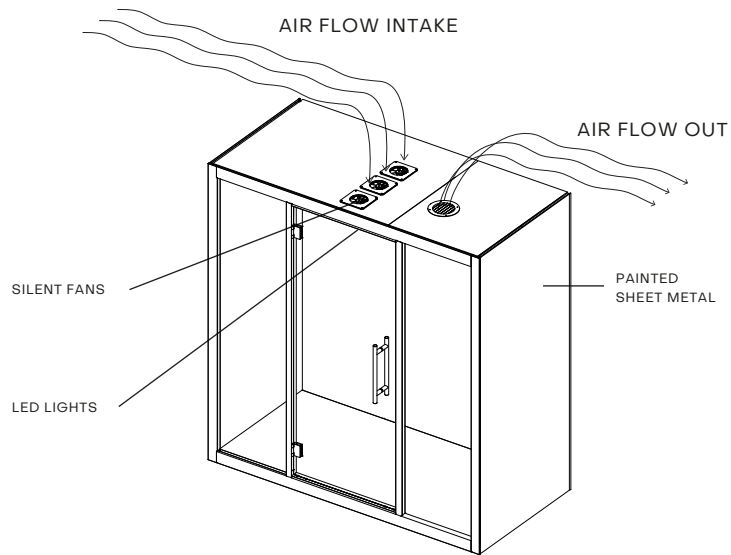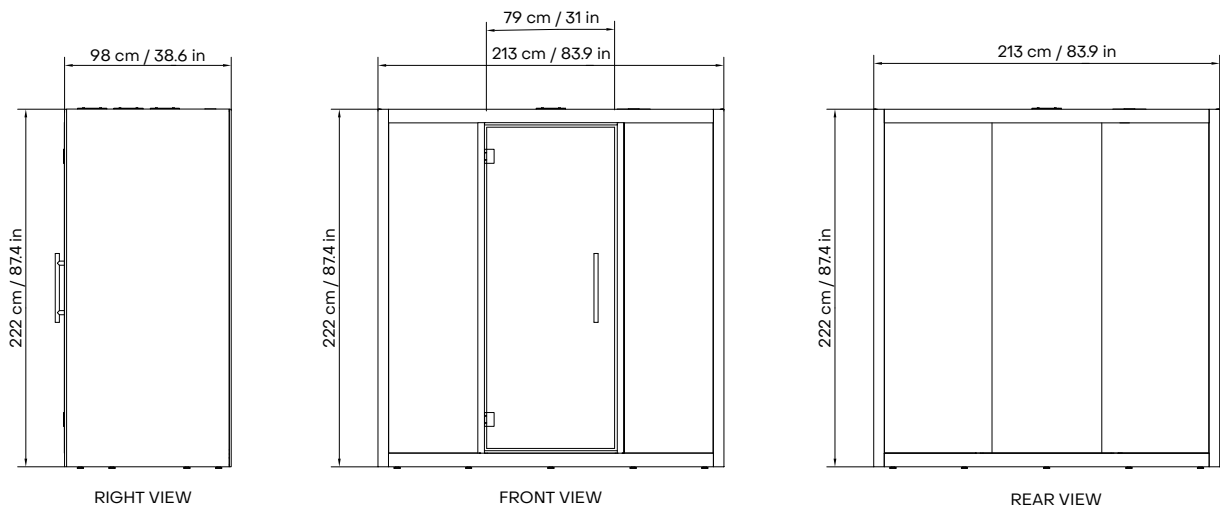

MINIMAL SPACE BETWEEN POD AND CEILING



SPACE BETWEEN FLOOR AND POD

2 cm / 0.8 in



Chatbox Duo technical specification

GENERAL PRODUCT INFO


Exterior size (W*D*H)	213 × 98 × 222 cm 83.9 × 38.6 × 87.4 in
Interior size (W*D*H)	200 × 91 × 204 cm 78.7 × 35.8 × 80.3 in
Weight (net)	490 kg / 1080 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 55 l/s (198 m ³ /h) (117 ft ³ /min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	Option one: 2 x 110-240 V (10 A) Option two: 110-240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	29,4 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist



Chatbox Duo features



Occupancy light

EXTRA FEATURE

Retractable coat/bag hook A practical and nice-looking foldable hook for coat or bag

Air flow and lighting dimmer A well-designed and functional touch screen to adjust air-flow speed and lights to create your own comfort zone

Occupancy light

Options for surfaces

Exterior colors collection



Standard wall and ceiling



Dark gray

Standard floor



Dark gray

Standard profile



Black

